

# SYOUR FLET

There is no feeling like an incoming storm. The air dampens. The clouds close. The sky darkens. And the focus becomes clear. Because for you—snow and ice pros—this isn't just some storm. It's go time.

Since 1948, Fisher Engineering has built products that capitalize on that feeling. And this winter, we're proud to present our full line of ice control equipment for operators of every kind.

Now let's get your fleet ready for the storm—starting with products that take on the ice.



**HOPPERS** 

Commercial operators servicing multiple large, complex properties with de-icing services utilizing bulk materials.

# STORM READY?




**TAILGATES** 

Commercial operators and private users servicing smaller properties or areas of focus with bagged de-icing materials.





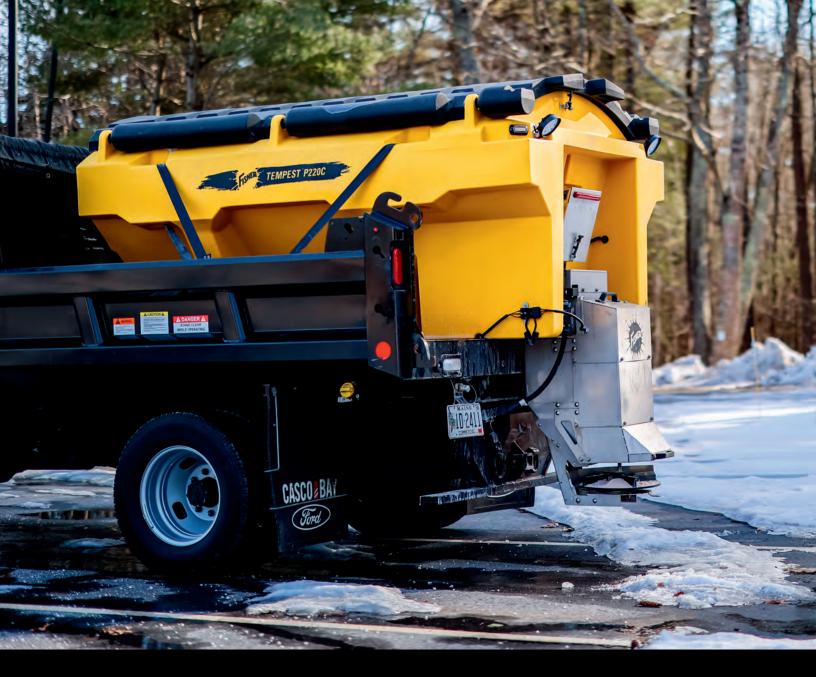

# TEMPEST POLY HOPPERS CORROSION-RESISTANT CONSTRUCTION KEEPS YOU EFFICIENT

#### **BEST SUITED FOR:**

Commercial operators working multiple job sites, especially in wet and coastal regions where rust is prevalent and de-icing materials need to be kept covered.

#### **VEHICLE COMPATIBILITY:**

3/4 and 1-Ton Pick Up Trucks, Dump Body Trucks, and Flatbed Trucks.

#### WHAT THIS MEANS FOR YOU:

The all-new TEMPEST Poly Hoppers bring an updated poly hopper tub and enhanced molded lid design to the hopper legacy, meeting the demands of today's operator. These models are made of corrosion-resistant polyethylene with a precise geometry that promotes even material flow and two material delivery options.

**MODEL EXPLANATION:** 

Material Delivery System

Hopper Material LHopper Capacity

#### SIGNATURE FEATURES



#### POLY CONSTRUCTION

High-density polyethylene construction fights rust and corrosion, ideal for spreading salt and other de-icing materials in harsh environments. The hopper tub geometry ensures de-icing material is evenly delivered to the chain or auger, allowing even material unloading and smooth flow with each load.



#### STAND ON END STORAGE

A special design allows the hopper to stand on end for easier storage in the off-season. This also allows for easier installation into the truck bed.



#### INTERLOCKING POLY LIDS

Standard hopper lids have molded channels for moisture runoff. Pockets at the end of the lid allow a 2×4 to or shovel handle to be inserted for leverage and easy opening.



#### CHOICE OF MATERIAL DELIVERY

Operations can choose the delivery system best suited for their de-icing program. The all-new patented HELIXX™ auger delivery system (*shown*) is optimized to operate in the target range for the even spread of rock salt. The heavy-duty pintle chain delivery system is optimized for thick, heavy materials like sand and salt/sand mix.







# TEMPEST<sup>TM</sup> P150C | P150A

POLY HOPPER SPREADERS

These all-new poly hoppers offer 1.5 cu yd of capacity for pickup trucks. Smooth, even spreading allows de-icing services to be delivered quickly and efficiently. Durable, corrosion-resistant, and versatile - they're ideal for commercial applications.


MATERIAL COMPATIBILITY: HELIXX''' AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SAL

**HOPPER CAPACITY:** 1.5 cu yd (*1.15 cu m*)

**VEHICLE COMPATIBILITY:** 3/4- & 1-Ton Pickup Trucks

MINIMUM BED LENGTH: 90" (228.6 cm)

TEMPEST ™ POLY HOPPER SPREADERS

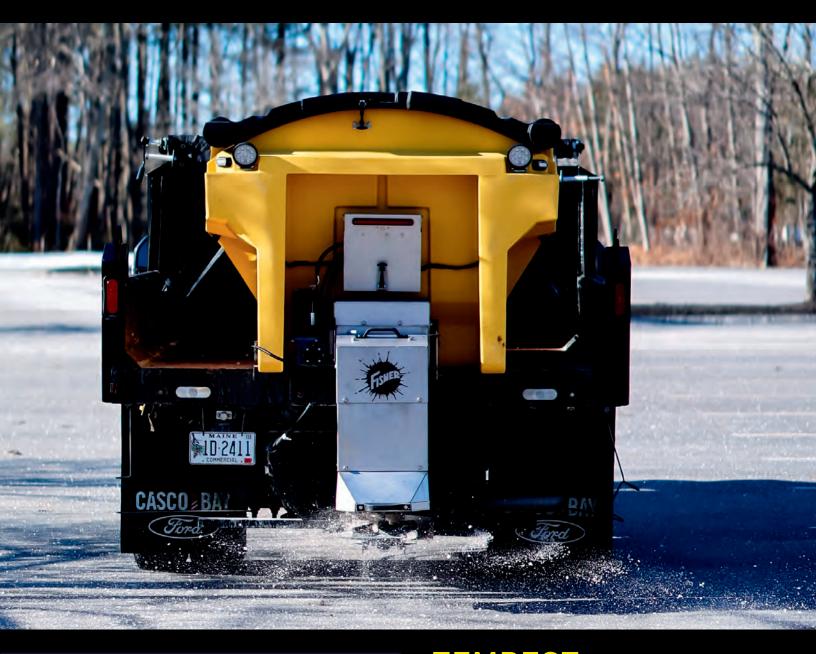



## TEMPEST P220C | P220A

POLY HOPPER SPREADERS

Stepping up in size, these models offer 2.2 cu yd of capacity for use with pickup trucks. Their corrosion-resistant construction makes them perfect for commercial applications. De-icing material is delivered in a smooth and consistent arc to ensure an even spread for maximum productivity and efficiency.

MATERIAL COMPATIBILITY:

HOPPER CAPACITY: 2.2 cu yd (1.68 cu m)

**VEHICLE COMPATIBILITY:** 3/4- & 1-Ton Pickup Trucks

MINIMUM BED LENGTH: 90" (*228.6 cm*)



## TEMPEST<sup>TM</sup> STAINLESS STEEL HOPPERS HEAVY-DUTY EQUIPMENT TO GET YOU AHEAD

#### **BEST SUITED FOR:**

Commercial operators working multiple job sites where durability and high-capacity performance are non-negotiable.

#### **VEHICLE COMPATIBILITY:**

Pickup Trucks, Dump Body Trucks, Flatbed Trucks.

#### WHAT THIS MEANS FOR YOU:

The TEMPEST Stainless Steel Hopper is tougher than nails. Its stainless steel construction resists impact and corrosion, allowing smooth material flow with minimal wear, making it ideal for heavy-duty commercial applications. The geometry promotes even material flow with a choice of material delivery systems.

**MODEL** EXPLANATION:

Material Delivery System

#### SIGNATURE FEATURES



#### STAINLESS STEEL CONSTRUCTION

Crafted with heavy-duty stainless steel for unmatched durability and corrosion resistance in the storm.

#### DUAL ELECTRIC MOTORS

Take control of every job with independent motors for precise control over auger and spinner functions.



#### VARIABLE SPEED CONTROL

Enhanced dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency.



#### CHOICE OF MATERIAL DELIVERY

Operations can choose the delivery system best suited for their de-icing program. The all-new patented HELIXX™ auger delivery system (*shown*) is optimized to operate in the target range for the even spread of rock salt. The heavy-duty pintle chain delivery system is optimized for thick, heavy materials like sand and salt/sand mix.



#### TEMPEST™ COMPACT S035C/S035A & S070C/S070A

STAINLESS STEEL HOPPERS

These compact models fit in half-ton trucks with room to haul extra de-icing material or sidewalk management equipment. They are ideal for operators with smaller, more compact areas that they service. (*S070C model shown*.)

MATERIAL COMPATIBILITY:

HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY: 0.35 cu yd (*0.27 cu m*) | 0.70 cu yd (*0.54 cu m*)

HOPPER CAPACITY W/ EXTENSION COLLAR: 0.6 cu yd (0.46 cu m) 1.2 cu yd (0.92 cu m)

**VEHICLE COMPATIBILITY:** Compact Trucks | ½-Ton Pickup Trucks

MINIMUM BED LENGTH: 30" (76.20 cm) | 44" (111.76 cm)



### TEMPEST S220C/S220A

STAINLESS STEEL HOPPERS

High spreading performance from a unit that fits 3/4- and 1-ton pickup trucks. This model meets the needs of commercial operators with multiple large properties to cover, using a standard pickup.

MATERIAL COMPATIBILITY:

HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY: 3.0 cu yd (2.29 cu m)

HOPPER CAPACITY W/ EXTENSION COLLAR: 4.0 cu yd (3.06 cu m)

**VEHICLE COMPATIBILITY:** 3/4- & 1-Ton Pick up Trucks

MINIMUM BED LENGTH: 90" (228.6 cm)



## TEMPEST S400C/S400A

STAINLESS STEEL HOPPERS

For dump body and flatbed trucks seeking more, this model offers 4.0 cubic yards of capacity to cover more acreage in between fill ups.

MATERIAL COMPATIBILITY:

VEHICLE COMPATIBILITY:

HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

**HOPPER CAPACITY:** 4.0 cu yd (*3.06 cu m*)

HOPPER CAPACITY W/ EXTENSION COLLAR: 5.0 cu yd (*3.82 cu m*)

Dump Body or Flatbed Trucks

MINIMUM BED LENGTH: 96" (243.84 cm)



### TEMPEST S150C / S150A

STAINLESS STEEL HOPPERS

Stepping up, the S150 fits into standard pickup trucks with 76" or more of bed space. With 1.5 cu yd of capacity, this model consistently delivers for commercial operators.

MATERIAL COMPATIBILITY:

HELIXX™ AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY: 1.5 cu yd (1.15 cu m)

HOPPER CAPACITY W/ EXTENSION COLLAR: 2.0 cu yd (1.53 cu m)

**VEHICLE COMPATIBILITY:** 3/4- & 1-Ton Pickup Trucks

MINIMUM BED LENGTH: 76" (193.04 cm)



### TEMPEST S300C/S300A

STAINLESS STEEL HOPPERS

For fleets with dump body and flatbed trucks, this model comes highly recommended. With 3.0 cubic yards of capacity, operators seamlessly shift from one large property to the next.

MATERIAL COMPATIBILITY

HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY: 3.0 cu yd (2.29 cu m)

VEHICLE COMPATIBILITY: Dump Body or Flatbed Trucks

4.0 cu yd (3.06 cu m)

MINIMUM BED LENGTH: 90" (228.6 cm)



### TEMPEST S500C / S500A

HOPPER CAPACITY W/ EXTENSION COLLAR:

STAINLESS STEEL HOPPERS

The biggest and boldest: S500C/S500A Spreaders bring 5.0 cubic yards of capacity, maximizing the de-icing impact of your dump body and flatbed fleet, increasing the acreage each operator can treat in between fill ups.

MATERIAL COMPATIBILITY:

HELIXX AUGER - BULK ROCK SALT, PINTLE CHAIN - SAND & SALT/SAND MIX

HOPPER CAPACITY: 5.0 cu yd (3.82 cu m)

**HOPPER CAPACITY W/ EXTENSION COLLAR:** 6.0 cu yd (4.59 cu m)

VEHICLE COMPATIBILITY: Dump Body or Flatbed Trucks

MINIMUM BED LENGTH: 96" (243.84 cm)

## TRILOGY DEFENSE

PRE-WET AND DIRECT LIQUID APPLICATION SYSTEM

#### **BEST SUITED FOR:**

Professionals needing advanced de-icing capabilities, including areas where snowfall is low but slick surfaces are relentless.

#### **SPREADER COMPATIBILITY:**

Compatible with all TEMPEST™ Spreaders.

#### **COMPATIBLE MATERIAL TYPES:**

Liquid de-icing solutions such as brine, calcium chloride solutions, and other premium solutions.

#### WHAT THIS MEANS FOR YOU:

The Trilogy Defense System adds onto your FISHER Spreader, widening your options for snow and ice removal.

Option 1: Standard material application, without liquid.

Option 2: Direct liquid application.

Option 3: Material and liquid combination, also known

as Pre-Wet.

Whether you're preparing for a storm or cleaning up the aftermath, the best modern tools are at the ready, all built to work together.

#### SIGNATURE FEATURES

#### ■ PRE-WET AND ANTI-ICING CAPABILITIES



The Trilogy Defense system features a spray tube that applies liquid directly to the granular material as it enters the pre-wet mixing chamber or nozzles that can spray liquid brine directly on the surface for treatment.

(Direct liquid application shown.)

#### ■ 7 GALLON/MINUTE SPREAD RATE



12-volt motor and pump combination provide a consistent spray rate for low maintenance and reliable performance.

#### MANUAL CONTROL VALVE



A manual lever on the pump box allows the operator to easily switch between pre-wet or direct liquid application mode when the accessory system is active.

#### ■ INTEGRATED CONTROL



Reduce cab clutter and enhance operator efficiency with the on/off accessory control seamlessly integrated into the TEMPEST spreader control.



## SPREADER ACCESSORIES

ESSENTIAL TOOLS THAT GROW WITH YOU

Explore a variety of accessories designed to enhance the functionality of your FISHER spreaders. From control systems to material storage solutions, these products ensure you have everything needed to tailor your hopper's performance to your operation's unique needs.

#### **FOR CHAIN DRIVEN UNITS**

SAFETY ACCESSORIES	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
STROBE LIGHT KIT:	•	•	•			•			•
WORK LIGHT KIT:	•	•	•			•		•	•
SECONDARY WORK LIGHT KIT:	•	•	•			•	•		
LICENSE PLATE KIT:	•	•	STD						
MATERIAL FLOW & PERFORMANCE	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
INVERTED V:	•	•	•	•	•	•	STD	STD	STD
CHUTE EXTENSION KIT:			•	•	•	STD	STD	STD	STD
VIBRATOR KIT:	•	•		•	•	•	•	•	•
FEEDGATE KIT:			•	•	•	•	•	•	•
CAPACITY EXPANSION	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
EXPANSION COLLAR:		•	•		•			•	•
SPILL GUARDS:	•	•	•		•		•	•	•
REARVIEW MATERIAL MONITORING CAMERA:	•	•	•	•	•	•	•	•	•
TARP KIT:	•	•	•		•				
ROLL TARP COVER:								•	•
CENTRAL POINT GREASE KIT:			•	•	•	•	•	•	•
OPERATOR CUSTOMIZATION	S035C	S070C	S150C	P150C	S220C	P220C	S300C	S400C	S500C
SPREADER CONTROL ADAPTER PLATE:	•	•	•	•	•	•	•	•	•
CENTRAL CUP HOLDER MOUNT:	•	•	•	•	•	•		•	•

#### **ACCESSORY CATEGORIES**

#### **SAFETY ACCESSORIES:**

Enhance the visibility of your ice control equipment when it's on the job with assorted lighting options and when traveling between jobs with road safety accessories.

#### **CAPACITY EXPANSION:**

Expand the capacity of your hopper to grow with your business.

#### **MATERIAL FLOW & PERFORMANCE:**

Keep your de-icing material dry and maximize its even flow and spread for maximum performance. Adapt to the unique demands of your materials and applications.

#### **OPERATOR CUSTOMIZATION**

Allow your operators to customize the spreader control experience in the cab.

#### **FOR AUGER DRIVEN UNITS**

SAFETY ACCESSORIES	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
STROBE LIGHT KIT:	•	•			•		•	•	•
WORK LIGHT KIT:	•	•	•	•	•		•	•	•
SECONDARY WORK LIGHT KIT:	•	•	•	•	•	•	•	•	•
LICENSE PLATE KIT:	•	•	STD						
MATERIAL FLOW &									
PERFORMANCE	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
INVERTED V:	•	•	STD						
CHUTE EXTENSION KIT:			•	•	STD	STD	STD	STD	STD
VIBRATOR KIT:		•		•			•	•	•
CAPACITY EXPANSION	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
EXPANSION COLLAR:		•					•		•
SPILL GUARDS:	•	•	•		•		•	•	•
REARVIEW MATERIAL MONITORING CAMERA:	•	•	•	•	•	•	•	•	•
TARP KIT:	•	•	•		•				
ROLL TARP COVER:							•	•	•
CENTRAL POINT GREASE KIT:			•	•	•	•	•	•	•
OPERATOR									
CUSTOMIZATION	S035A	S070A	S150A	P150A	S220A	P220A	S300A	S400A	S500A
SPREADER CONTROL ADAPTER PLATE:	•	•	•	•	•	•	•	•	•
CENTRAL CUP HOLDER MOUNT:	•	o o	•	•	•	•	·	•	•



### TEMPEST<sup>TM</sup> POLY HOPPER

THE NEW HOPPER ON THE BLOCK, TURNING HEADS & GETTING WORK DONE.

All-new this season, the TEMPEST Hopper legacy continues with polyethylene construction, specifically built to fight off rust and corrosion found in de-icing. For wet and coastal conditions especially, this material remains unphased through the elements.

The poly hopper models feature standard, interlocking lids that protect de-icing materials from moisture and the elements. An enhanced design incorporates special channels that discard excess snow, water, and ice for easy opening and closing.

#### **TEMPEST STEEL HOPPERS**

THE ULTIMATE WORKHORSE, TRIED & TRUE BY FISHER NATION.

The TEMPEST Hoppers that started it all. They're as tough as they come, and unbeatable in durability and strength. Stainless steel construction stands up strong against bumps, bruises, and scrapes on the job, while maintaining structural integrity no matter what winter throws at you.

The riveted construction of the hopper allows for easier serviceability when the hopper makes contact with an unseen obstacle while in reverse.

## COMPREHENSIVE - IMPERIAL SYSTEM

## TEMPEST™ S035C/S035A

COMPACT STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	Compact Trucks
MATERIAL COMPATIBILITY: B	ulk Rock Salt   Sand & Salt/Sand Mix
CAPACITY (VOLUME):	.35 cu yd
CAPACITY (WEIGHT):	750 lb
CAPACITY (EXTENSION COLL	AR): 0.60 cu yd
SPREAD WIDTH:	Up to 36'

SPINNER SIZE:	12" Diameter	
APPROXIMATE WEIGHT (EMPTY	): 235 lb   192 lb	
OVERALL DIMENSIONS (LxWxH):	57" x 38" x 46"   52.75" x 38" x 45.5"	
HOPPER DIMENSIONS (LxWxH):	30" x 38" x 26"   30" x 38" x 25.75"	
BODY SIDE LENGTH:	30"	
MINIMUM BED LENGTH:	30"	
MATERIAL DELIVERY DIMENSIONS: 15.5" Chain   4" Diameter Auger		

## TEMPEST S070C/S070A

COMPACT STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	1/2-ton & Light Duty Pickup Trucks
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix
CAPACITY (VOLUME):	0.7 cu yd
CAPACITY (WEIGHT):	1,500 lb
CAPACITY (EXTENSION COI	LLAR): 1.2 cu yd
SPREAD WIDTH:	Up to 36'

SPINNER SIZE:	12" Diameter		
APPROXIMATE WEIGHT (EMPTY):	420 lb   337 lb		
OVERALL DIMENSIONS (LxWxH):	81" x 43" x 46"		
HOPPER DIMENSIONS (LxWxH):	81" x 42.75" x 45"		
BODY SIDE LENGTH:	54"		
MINIMUM BED LENGTH:	44"		
MATERIAL DELIVERY DIMENSIONS: 15.5" Wide Chain   4" Diameter auger			

## TEMPEST S150C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix
CAPACITY (VOLUME):	1.5 cu yd
CAPACITY (WEIGHT):	3,240 lb
CAPACITY (EXTENSION COLL	<b>AR):</b> 2.0 cu yd
SPREAD WIDTH: Salt: Up to 3	6'   Sand & Salt/Sand Mix: Up to 24'

SPINNER SIZE:	16" Diameter
APPROXIMATE WEIGHT (EMPTY):	530 lb
OVERALL DIMENSIONS (LxWxH):	107" x 50" x 51.75"
HOPPER DIMENSIONS (LxWxH):	84.5" x 50" x 32"
BODY SIDE LENGTH:	7'
MINIMUM BED LENGTH:	76"
MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

## TEMPEST S150A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MATERIAL COMPATIBILITY:	Bulk Rock Salt
CAPACITY (VOLUME):	1.5 cu yd
CAPACITY (WEIGHT):	3,240 lb
CAPACITY (EXTENSION COLL	<b>AR):</b> 2.0 cu yd
SPREAD WIDTH:	Salt: Up to 36'

SPINNER SIZE:	16" Diameter
APPROXIMATE WEIGHT (EMPTY):	500 lb
OVERALL DIMENSIONS (LxWxH):	111.5" x 50" x 50.5"
HOPPER DIMENSIONS (LxWxH):	84.5" x 50" x 32"
BODY SIDE LENGTH:	7'
MINIMUM BED LENGTH:	76"
MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter

#### HOPPER SPREADER TECHNICAL SPECS

## TEMPEST<sup>TM</sup> S220C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION	N: Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY	: 3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	580 lb
MATERIAL COMPATIBILIT	TY: Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	119.25" x 50" x 55.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION (	COLLAR): 2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   15.5" Wide

## TEMPEST S220A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	550 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH: Salt: Up	to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS: HEL	IXX™ Auger   6" Diameter

## TEMPEST S300C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION	N: Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY	: Dump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	750 lb
MATERIAL COMPATIBILI	TY: Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	120.25" x 70" x 72.75"
CAPACITY (VOLUME):	3.0 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 70" x 41"
CAPACITY (WEIGHT):	6,480 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION	COLLAR) 4.0 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

## TEMPEST S300A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY: Dump Body	or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	700 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	3.0 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 70" x 41"
CAPACITY (WEIGHT:	6,480 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	4.0 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS:	HELIXX Auger   6" Diameter

#### **COMPREHENSIVE - IMPERIAL SYSTEM**

## TEMPEST<sup>TM</sup> S400C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCT	TION: Riveted 16 Gauge Stainless Ste	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILI	TY: Dump Body or Flat Bed Trucks (Over 15,000 lb GVW	APPROXIMATE WEIGHT (EMPTY):	820 lb
MATERIAL COMPATIBI	LITY: Sand & Salt/Sand M	OVERALL DIMENSIONS (LxWxH):	128.75" x 70" x 75.50"
CAPACITY (VOLUME):	4.0 cu	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 43.75"
CAPACITY (WEIGHT):	8,640	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSIO	N COLLAR): 5.0 cu	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 2	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

## TEMPEST<sup>TM</sup> S400A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY: Dump Body	or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	770 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	129" x 70" x 74.25"
CAPACITY (VOLUME):	4.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 43.75"
CAPACITY (WEIGHT):	8,640 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	5.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS: HEL	_IXX™ Auger   6" Diameter

## TEMPEST S500C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTI	ON: Riveted 16 Gauge Stainle	ess Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILIT	Y: Dump Body or Flat Bed Trucks (Over 15,00	00 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	910 lb
MATERIAL COMPATIBIL	.ITY: Sand & Salt/S	Sand Mix	OVERALL DIMENSIONS (LxWxH):	126.25" x 70" x 82.25"
CAPACITY (VOLUME):		5.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 50.5"
CAPACITY (WEIGHT):	•	10,800 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION	COLLAR):	6.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix:	Up to 24'	MATERIAL DELIVERY DIMENSIONS:	Pintle Chain   16" Wide

## TEMPEST S500A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY: Dump Body	or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	850 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	1129" x 70" x 81"
CAPACITY (VOLUME):	5.0 cu yd	HOPPER DIMENSIONS (LxWxH):	108.5" x 70" x 50.5"
CAPACITY (WEIGHT):	10,800 lb	BODY SIDE LENGTH:	9'
CAPACITY (EXTENSION COLLAR):	6.0 cu yd	MINIMUM BED LENGTH:	96"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS: HE	ELIXX Auger   6" Diameter

#### HOPPER SPREADER TECHNICAL SPECS

## TEMPEST\*\* P150C POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Polyethylene	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	723 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	108.25" x 63.50" x 51.75"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	96.50" x 63.50" x 46"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COL	LAR): 2.0 cu yd	MINIMUM BED LENGTH:	74"
SPREAD WIDTH: Sal	t: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS	Pintle Chain   16" Wide

## TEMPEST\*\* P150A POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	673 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	108.25" x 63.50" x 51.75"
CAPACITY (VOLUME):	1.5 cu yd	HOPPER DIMENSIONS (LxWxH):	96.50" x 63.50" x 46"
CAPACITY (WEIGHT):	3,240 lb	BODY SIDE LENGTH:	7'
CAPACITY (EXTENSION COLLAR)	2.0 cu yd	MINIMUM BED LENGTH:	74"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS: HI	ELIXX™ Auger   6" Diameter

## TEMPEST\*\* P220C POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY: D	ump Body or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	823 lb
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH):	119.25" x 50" x 55.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT):	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION CO	LLAR) 2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'   Sand & Salt/Sand Mix: Up to 24'	MATERIAL DELIVERY DIMENSIONS	: Pintle Chain   16" Wide

## TEMPESTTM P220A POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	16" Diameter
VEHICLE COMPATIBILITY: Dump Body	or Flat Bed Trucks (Over 15,000 lb GVWR)	APPROXIMATE WEIGHT (EMPTY):	793 lb
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH):	123" x 70" x 71.50"
CAPACITY (VOLUME):	2.2 cu yd	HOPPER DIMENSIONS (LxWxH):	96.5" x 50" x 35.75"
CAPACITY (WEIGHT:	4,752 lb	BODY SIDE LENGTH:	8'
CAPACITY (EXTENSION COLLAR)	2.7 cu yd	MINIMUM BED LENGTH:	90"
SPREAD WIDTH:	Salt: Up to 36'	MATERIAL DELIVERY DIMENSIONS: HE	ELIXX Auger   6" Diameter

#### COMPREHENSIVE - METRIC SYSTEM

## TEMPEST™ S035C/S035A

COMPACT STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	Compact Trucks
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix
CAPACITY (VOLUME):	0.27 cu m
CAPACITY (WEIGHT):	340.2 kg
CAPACITY (EXTENSION COL	<b>LAR):</b> 0.46 cu m
SPREAD WIDTH:	0.97 m

SPINNER SIZE: 30.5 cm Diameter
APPROXIMATE WEIGHT (EMPTY): 106.59 kg | 87.1 kg

OVERALL DIMENSIONS (LxWxH): 144.8 × 96.5 × 116.8 | 134.0 × 96.5 × 115.6

HOPPER DIMENSIONS (LxWxH): 76.2 × 96.5 × 66.0 | 76.2 × 96.5 × 65.4

BODY SIDE LENGTH: 76.2 cm

MINIMUM BED LENGTH: 76.2 cm

MATERIAL DELIVERY DIMENSIONS: 39.37 cm Chain | 10.2 cm Diameter Auger

#### TEMPEST S070C/S070A

COMPACT STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	1/2-ton & Light Duty Pickup Trucks
MATERIAL COMPATIBILITY:	Bulk Rock Salt   Sand & Salt/Sand Mix
CAPACITY (VOLUME):	0.54 cu m
CAPACITY (WEIGHT):	680.39 kg
CAPACITY (EXTENSION CO	<b>LLAR):</b> 0.92 cu m
SPREAD WIDTH:	10.97 m

 SPINNER SIZE:
 30.5 cm Diameter

 APPROXIMATE WEIGHT (EMPTY):
 190.5 kg | 152.9 kg

 OVERALL DIMENSIONS (LxWxH):
 205.7 × 109.2 × 116.8 | 205.7 × 108.6 × 114.3

 HOPPER DIMENSIONS (LxWxH):
 137.2 × 109.2 × 71.1 | 138.4 × 108.6 × 69.2

 BODY SIDE LENGTH:
 137.2 cm

 MINIMUM BED LENGTH:
 137.2 cm

 MATERIAL DELIVERY DIMENSIONS:
 39.37 cm Chain | 10.2 cm Diameter Auger

### TEMPEST S150C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix
CAPACITY (VOLUME):	2.29 cu m
CAPACITY (WEIGHT):	2,939 kg
CAPACITY (EXTENSION COLL	<b>AR):</b> 3.06 cu m
SPREAD WIDTH: Salt: Up to 10.9	7 m   Sand & Salt/Sand Mix: Up to 7.32 m

SPINNER SIZE: 40.64 cm Diameter

APPROXIMATE WEIGHT (EMPTY): 340 kg

OVERALL DIMENSIONS (LxWxH): 305.4 cm x 177.8 cm x 184.8 cm

HOPPER DIMENSIONS (LxWxH): 245.11 cm x 177.8 cm x 104.1 cm

BODY SIDE LENGTH: 2.44 m

MINIMUM BED LENGTH: 228.6 cm

MATERIAL DELIVERY DIMENSIONS: Pintle Chain 39.37 cm Wide

## TEMPEST S150A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks
MATERIAL COMPATIBILITY:	Bulk Rock Salt
CAPACITY (VOLUME):	1.15 cu m
CAPACITY (WEIGHT):	1,470 kg
CAPACITY (EXTENSION COLL	<b>AR):</b> 1.53 cu m
SPREAD WIDTH:	Salt: Up to 10.97 m

SPINNER SIZE:	140.64 cm Diameter
APPROXIMATE WEIGHT (EMPTY):	227 kg
OVERALL DIMENSIONS (LxWxH):	283.2 cm x 127 cm x 128.3 cm
HOPPER DIMENSIONS (LxWxH):	214.6 cm x 127 cm x 81.3 cm
BODY SIDE LENGTH:	2.13 m
MINIMUM BED LENGTH:	193 cm
MATERIAL DELIVERY DIMENSIONS: H	HELIXX Auger   15.25 cm Diameter
	APPROXIMATE WEIGHT (EMPTY): OVERALL DIMENSIONS (LxWxH): HOPPER DIMENSIONS (LxWxH): BODY SIDE LENGTH: MINIMUM BED LENGTH:

#### HOPPER SPREADER TECHNICAL SPECS

## TEMPEST<sup>TM</sup> S220C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	268 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH): 302.9	cm x 127 cm x 141.0 cm
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LxWxH): 245.1 c	cm x 127 cm x 90.8 cm
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR):	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm
SPREAD WIDTH: Salt: Up to 10.97 m	Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS: Pintle	Chain   39.37 cm Wide

## TEMPEST S220A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE: 40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY): 249 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH): 312.4 cm x 177.8 cm x 181.6 cm
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LxWxH): 245.1 cm x 127 cm x 90.8 cm
CAPACITY (WEIGHT):	2,155 kg	BODY SIDE LENGTH: 2.44 m
CAPACITY (EXTENSION COLLAR)	2.06 cu m	MINIMUM BED LENGTH: 228.6 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS: HELIXX™ Auger   15.25 cm Diameter

## TEMPEST S300C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body of	or Flat Bed Trucks (Over 6803.88 kg GVWR)	APPROXIMATE WEIGHT (EMPTY):	240 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH): 271.8	cm x 127 cm x 131.4 cm
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH): 214.6	6 cm x 127 cm x 81.3 cm
CAPACITY (WEIGHT):	1,470 kg	BODY SIDE LENGTH:	2.13 m
CAPACITY (EXTENSION COLLAR)	1.53 cu m	MINIMUM BED LENGTH:	193 cm
SPREAD WIDTH: Salt: Up to 10.97 m	Sand & Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS: Pintl	le Chain   39.37 cm Wide

## TEMPEST S300A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	318 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LxWxH): 312.4 cm x 177.8	3 cm x 181.6 cm
CAPACITY (VOLUME):	2.29 cu m	HOPPER DIMENSIONS (LXWXH): 245.11 cm x 177.8	3 cm x 104.1 cm
CAPACITY (WEIGHT:	2,939 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR)	3.06 cu m	MINIMUM BED LENGTH:	228.6
SPREAD WIDTH:	10.97 m	MATERIAL DELIVERY DIMENSIONS: HELIXX Auger   1	5.25 cm Diameter

#### **COMPREHENSIVE - METRIC SYSTEM**

## TEMPEST<sup>TM</sup> S400C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	372 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LXWXH): 327.0	cm x 177.8 cm x 191.8 cm
CAPACITY (VOLUME):	3.06 cu m	HOPPER DIMENSIONS (LxWxH): 275.6	6 cm x 177.8 cm x 111.1 cm
CAPACITY (WEIGHT):	3,919 kg	BODY SIDE LENGTH:	2.74 m
CAPACITY (EXTENSION COLLAR):	3.82 cu m	MINIMUM BED LENGTH:	243.8 cm
SPREAD WIDTH: Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m		MATERIAL DELIVERY DIMENSIONS: Pir	ntle Chain   39.37 cm Wide

## TEMPEST \$400A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	349 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH): 327.7	cm x 177.8 cm x 188.6 cm
CAPACITY (VOLUME):	3.06 cu m	HOPPER DIMENSIONS (LxWxH): 275.6	6 cm x 177.8 cm x 111.1 cm
CAPACITY (WEIGHT):	3,919 kg	BODY SIDE LENGTH:	2.74 m
CAPACITY (EXTENSION COLLAR):	3.82 cu m	MINIMUM BED LENGTH:	243.8 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS: HELIX	X™ Auger   15.25 cm Diameter

## TEMPEST S500C STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	413 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LXWXH): 320.7	cm x 177.8 cm x 208.9 cm
CAPACITY (VOLUME):	3.82 cu m	HOPPER DIMENSIONS (LXWXH): 275.6	6 cm x 177.8 cm x 128.3 cm
CAPACITY (WEIGHT):	4,899 kg	BODY SIDE LENGTH:	2.74 m
CAPACITY (EXTENSION COLLAR):	4.59 cu m	MINIMUM BED LENGTH:	243.8 cm
SPREAD WIDTH: Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m		MATERIAL DELIVERY DIMENSIONS: Pi	ntle Chain   39.37 cm Wide

## TEMPEST S500A STAINLESS STEEL HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	386 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH): 327.7	cm x 177.8 cm x 205.7 cm
CAPACITY (VOLUME):	3.82 cu m	HOPPER DIMENSIONS (LXWXH): 275.6	cm x 177.8 cm x 128.3 cm
CAPACITY (WEIGHT):	4,899 kg	BODY SIDE LENGTH:	2.74 m
CAPACITY (EXTENSION COLLAR):	4.59 cu m	MINIMUM BED LENGTH:	243.8 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS: HELD	XX Auger   15.25 cm Diameter

#### HOPPER SPREADER TECHNICAL SPECS

## TEMPEST\*\* P150C POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Polyethylene	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY):	328 kg
MATERIAL COMPATIBILITY:	Sand & Salt/Sand Mix	OVERALL DIMENSIONS (LxWxH): 275.0 cr	m x 161.3 cm x 131.4 cm
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH): 245.1 cr	m x 161.3 cm x 116.8 cm
CAPACITY (WEIGHT):	1,469.9 kg	BODY SIDE LENGTH:	2.13 m
CAPACITY (EXTENSION COLLAR):	1.53 cu m	MINIMUM BED LENGTH:	188.0 cm
SPREAD WIDTH: Salt: Up to10.97 m   Sand	& Salt/Sand Mix: Up to 7.32 m	MATERIAL DELIVERY DIMENSIONS: Pintle	e Chain   39.37 cm Wide

## TEMPEST\*\* P150A POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE: 40.64 cm Diameter
VEHICLE COMPATIBILITY:	3/4- & 1-Ton Pickup Trucks	APPROXIMATE WEIGHT (EMPTY): 305.3 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH): 275.6 cm x 161.3 cm x 131.4 cm
CAPACITY (VOLUME):	1.15 cu m	HOPPER DIMENSIONS (LxWxH): 245.1 cm x 161.3 cm x 116.8 cm
CAPACITY (WEIGHT):	1,469.9 kg	BODY SIDE LENGTH: 2.13 m
CAPACITY (EXTENSION COLLAR)	1.53 cu m	MINIMUM BED LENGTH: 188.0 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS: HELIXX™ Auger   15.25 cm Diameter

## TEMPEST\*\* P220C POLY HOPPER SPREADER

HOPPER CONSTRUC	CTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	373.3 kg	
MATERIAL COMPATIBILITY: Sand & Salt/Sand Mix		OVERALL DIMENSIONS (LXWXH): 295.3 cm x 161.3 cm x 141.0 cm		
CAPACITY (VOLUMI	E):	1.68 cu m	HOPPER DIMENSIONS (LXWXH): 245.1	cm x 161.3 cm x 130.8 cm
CAPACITY (WEIGHT	Γ):	2,155 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR) 2.06 cu m		MINIMUM BED LENGTH:	228.6 cm	
SPREAD WIDTH: Salt: Up to 10.97 m   Sand & Salt/Sand Mix: Up to 7.32 m		MATERIAL DELIVERY DIMENSIONS: Pintle Chain   39.37 cm Wide		

## TEMPEST P220A POLY HOPPER SPREADER

HOPPER CONSTRUCTION:	Riveted 16 Gauge Stainless Steel	SPINNER SIZE:	40.64 cm Diameter
VEHICLE COMPATIBILITY: Dump Body or Flat Bed Trucks (Over 6803.88 kg GVWR)		APPROXIMATE WEIGHT (EMPTY):	360 kg
MATERIAL COMPATIBILITY:	Bulk Rock Salt	OVERALL DIMENSIONS (LXWXH): 295.3	3 cm x 161.3 cm x 141.0 cm
CAPACITY (VOLUME):	1.68 cu m	HOPPER DIMENSIONS (LXWXH): 245.1	cm x 161.3 cm x 130.8 cm
CAPACITY (WEIGHT:	2,155 kg	BODY SIDE LENGTH:	2.44 m
CAPACITY (EXTENSION COLLAR)	2.06 cu m	MINIMUM BED LENGTH:	228.6 cm
SPREAD WIDTH:	Salt: Up to 10.97 m	MATERIAL DELIVERY DIMENSIONS: HELIX	X™ Auger   15.25 cm Diameter







# TAILGATE SPREADERS RIGHT-SIZED FOR BAGGED DE-ICER APPLICATION

#### **BEST SUITED FOR:**


Commercial and residential operators with pickup trucks that need to treat small areas or provide touch up services.

#### **VEHICLE COMPATIBILITY:**

Fits wide range of truck models; (see specs on page 38.)

#### WHAT THIS MEANS FOR YOU:

For small properties, touch-up jobs, and at-home use, tailgate spreaders are the answer. Easy to fill with a variety of bagged de-icers, tailgate spreaders attach easily and leave the truck bed free to haul additional material or equipment.

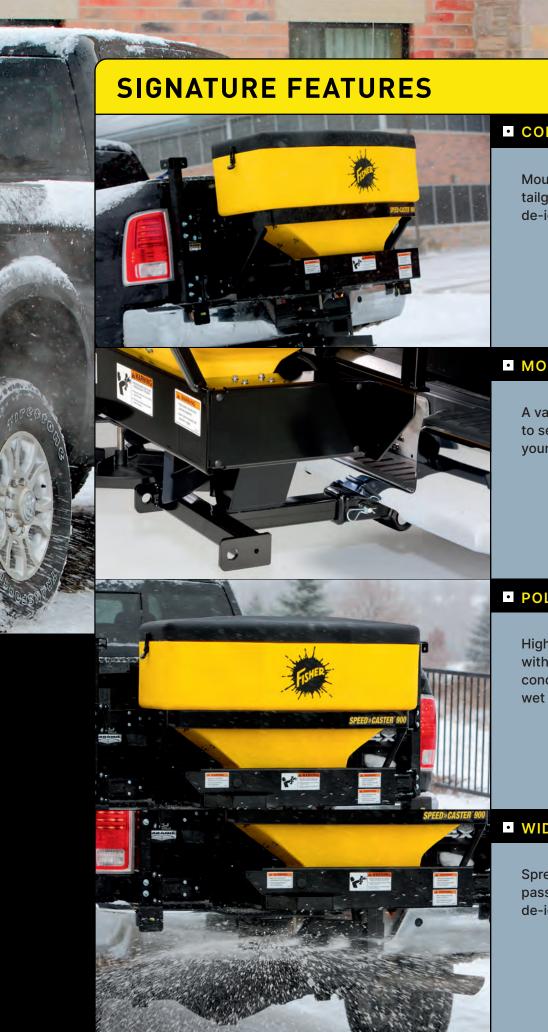

#### CONSERVE SPACE

Mounting the spreader on your truck's tailgate keeps the truck bed free for extra de-icing material or equipment.

#### MOUNTING CHOICES

A variety of mounting options allow you to select the model that best fits your vehicle and usage.

#### POLYETHYLENE CONSTRUCTION

High-quality polyethylene construction withstands the cold and corrosive conditions of icy operations—especially in wet and coastal conditions.

#### WIDESPREAD PERFORMANCE

Spread widths from 20' to 40' allow each pass to handle a wide area for maximum de-icing performance.





# QUICK-CASTERTM 300

#### TAILGATE BROADCAST SPREADER

With 3.0 cu ft of capacity, the QUICK-CASTER 300 tailgate spreader is a perfect choice for treating high traffic areas within a property or completing touch-up work. Optimized to work with bagged rock salt, the 300G works with a wide range of vehicles.

**CAPACITY:** 3.0 cu ft (*0.09 cu m*)

 $\textbf{MATERIAL DELIVERY SYSTEM (}\textit{cm}\textbf{)}\text{:} Single-Stage, 2.5" x 5.75" (}\textit{6.35} \times \textit{14.61}\textbf{)} \text{ steel vertical auger}$ 

**SPREAD WIDTH:** 25' (*7.6 m*)

QUICK-CASTER ™ POLY TAILGATE SPREADERS



#### QUICK-CASTER™ 300G

TAILGATE BROADCAST SPREADER WITH ELECTRIC FEEDGATE

The QUICK-CASTER 300G features an electric feedgate for the precise spreading of fine de-icing materials for high traffic areas and touch up work.

CAPACITY:

3.0 cu ft (0.09 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger

SPREAD WIDTH:

20' *(6.1 m)* 



## QUICK-CASTER 300W

WIRELESS ELECTRIC TAILGATE SPREADER

This 3.0 cu ft tailgate spreader communicates wirelessly with the in-cab control for easy installation with no wires or harnesses. Simply mount to the vehicle's tailgate, pair to the control, and head off to spread material.

CAPACITY:

3.0 cu ft (0.09 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger

SPREAD WIDTH:

25' (7.6 m)





# LOW PROFILE 500

#### TAILGATE BROADCAST SPREADER

A compact, low-profile spreader designed for light-duty use, providing efficient salt and sand distribution for smaller truck setups and residential areas.

**CAPACITY:** 5.0 cu ft (*0.14 cu m*)

 $\textbf{MATERIAL DELIVERY SYSTEM (\textit{cm}):} Single-Stage, 2.5" x 5.75" (\textit{6.35} \times 14.61) steel vertical auger$ 

**SPREAD WIDTH:** 30' (*9.14 m*)

LOW PROFILE POLY TAILGATE SPREADERS



## LOW PROFILE 1000

TAILGATE BROADCAST SPREADER

Get mid-range capacity for a tailgate spreader with a low-profile design for clear visibility to the rear of the vehicle.

CAPACITY:

8.0 cu ft (0.23 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger

**SPREAD WIDTH:** 30' (*9.14 m*)



# LOW PROFILE 2500

TAILGATE BROADCAST SPREADER

A low-profile design and the highest capacity in the range make the LOW PROFILE 2500 tailgate spreader the choice for those servicing high traffic areas for mid- to large sized properties.

CAPACITY:

8.5 cu ft (0.24 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 × 14.61) steel vertical auger

SPREAD WIDTH:

30' (*9.14 m*)





# SPEED-CASTER™ 525

POLY TAILGATE HOPPER

A high-performance spreader designed for light to medium-duty use, delivering precise material distribution with a compact design for efficient snow and ice control.

**CAPACITY:** 5.25 cu ft (*0.15 cu m*)

MATERIAL DELIVERY SYSTEM (cm): Dual-Stage, 3" x 14" (7.62 × 35.56)

steel vertical auger

**SPREAD WIDTH:** 30' (*9.14 m*)

SPEED-CASTER ™ POLY TAILGATE SPREADERS





### SPEED-CASTER 900

POLY TAILGATE HOPPER

All of the performance and efficiency of the Speed-Caster 525, with over 40% more capacity. Ideal for those who prefer a tailgate spreader but have plenty of work to do.

**CAPACITY:** 9.00 cu ft (*0.25 cu m*)

MATERIAL DELIVERY SYSTEM (*cm*): Dual-Stage, 3" x 14" (*7.62 × 35.56*) steel vertical auger

SPREAD WIDTH: 40' (12.19 m)

## MOUNTING & MATERIAL GUIDE

(Assumes dry, free-flowing materials)

- \* May require use of auger tube restriction kit accessory.
- ↑ May require 5-flight auger accessory.
- ←Receiver mount & adapter required.

  Sold separately.

#### **MOUNTS GUIDE (TAILGATES ONLY)**

QUICK-CASTER™	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
RECEIVER HITCH MOUNT:	STD	STD	STD
FIXED MOUNT:			
DUAL-SWING MOUNT:			
UTILITY MOUNT:	•	•	•
DROP UTILITY MOUNT:	•	•	•
3-POINT MOUNT:	•		•
PIVOT MOUNT:			

LOW PROFILE	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER™	SPEED-CASTER 525	SPEED-CASTER 900
RECEIVER HITCH MOUNT:	STD	•	STD	RECEIVER HITCH MOUNT:	STD	*
FIXED MOUNT:		•		FIXED MOUNT:		
DUAL-SWING MOUNT:		•		DUAL-SWING MOUNT:		
UTILITY MOUNT:				UTILITY MOUNT:		
DROP UTILITY MOUNT:				DROP UTILITY MOUNT:		
3-POINT MOUNT:				3-POINT MOUNT:	STD	
PIVOT MOUNT:				PIVOT MOUNT:		

#### **TAILGATE SPREADER ACCESSORIES**

SAFETY ACCESSORIES	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
WORK LIGHT KIT (SINGLE) FLEET FLEX			
SECONDARY WORK LIGHT KIT (SINGLE) FLEET FLEX			
MATERIAL FLOW & PERFORMANCE	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TOP SCREEN BAG SPLITTER KIT			
ADJUSTABLE DEFLECTOR KIT			
SCREEN KIT			
MATERIAL CONTROL TUBE			
WEATHER COVER	STD	STD	STD
5-FLIGHT AUGER			

OPERATOR CUSTOMIZATION	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TRUCK PROTECTOR FLAP			
7-PIN WIRELESS VEHICLE HARNESS			•
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT			

#### MATERIALS GUIDE - GRANULAR (ALL PRODUCTS)

ALL PRODUCTS	TEMPEST™ POLY	TEMPEST STAINLESS	QUICK-CASTER™ 300G	QUICK-CASTER 300 & 300W	LOW PROFILE 500
BAGGED ICE MELTERS:					•
BAGGED ROCK SALT:			•	•	•
BULK SALT:	•	•	•		
CALCIUM FLAKES:			•		• ↑
CALCIUM CHLORIDE PELLETS:			•		• ↑
SALT/SAND MIX:	•	•			
SAND:	•	•			
	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER™ 525	SPEED-CASTER 900	WALK-BEHIND WB-100B & WB-160D
BAGGED ICE MELTERS:					
BAGGED ICE MELTERS: BAGGED ROCK SALT:	1000	2500	525	900	WB-100B & WB-160D
	1000	2500	525 • *	900	WB-100B & WB-160D
BAGGED ROCK SALT:	1000	2500	525 • * •	900 • * •	WB-100B & WB-160D  •
BAGGED ROCK SALT: BULK SALT:	1000	2500	525 • * •	900	WB-100B & WB-160D  • • •
BAGGED ROCK SALT: BULK SALT: CALCIUM FLAKES:	1000 • •	2500 • •	525 • * • •	900  *  *  *  *	WB-100B & WB-160D  • • • •

#### MATERIALS GUIDE - LIQUID (ALL PRODUCTS)

ALL PRODUCTS	WALK-BEHIND SS-120 Sprayer	PRE-WET SYSTEMS Trilogy Defense
BRINE	•	
CALCIUM CHLORIDE SOLUTION	•	
PREMIUM SOLUTIONS	•	•

LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
•	•		•	•
•	•	•		
LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
•		•		
•	•			
	•			
			•	•
•	•			
P				

LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
	•			
			•	•



#### QUICK-CASTERTM

Single-stage delivery, compact and lightweight, designed for easy mounting on smaller vehicles, ideal for residential properties or light commercial use.

#### **LOW PROFILE**

Single-stage delivery, low profile design for better visibility and stability, perfect for mid-sized trucks and commercial applications.

#### SPEED-CASTERTM

Dual-stage delivery, robust performance with dual motors for enhanced material flow control, suited for medium to heavy-duty commercial use.

#### COMPREHENSIVE - IMPERIAL SYSTEM

#### **QUICK-CASTER™ 300**

#### POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt
CAPACITY (VOLUME):	3.0 cu ft
SPREAD WIDTH:	Up to 25'

APPROXIMATE WEIGHT (EMPTY): 68 lb

OVERALL DIMENSIONS (LxWxH): 22" x 30" x 30"

MOTOR: 12-volt DC motor mounted in weather-resistant enclosure

AUGER (DIAMETER X LENGTH): 3' Vertical High-Flow Auger

SPINNER SIZE: 10" Nylon/Glass Reinforced Resin

AVAILABLE MOUNTS: 2" Light-Duty Hitch Mount (std)

#### **QUICK-CASTER 300G**

#### POLY TAILGATE SPREADER WITH ELECTRIC FEEDGATE

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY: Bag	gged Ice Melters, Clacium Flakes,
Calcium C	hloride Pellets, Bagged Rock Salt
CAPACITY (VOLUME):	3.0 cu ft
SPREAD WIDTH:	Up to 20'

APPROXIMATE WEIGHT (EMPTY): 75 lb

OVERALL DIMENSIONS (LxWxH): 22" x 30" x 30"

MOTOR: 12-volt DC motor mounted in weather-resistant enclosure

AUGER (DIAMETER X LENGTH): 
SPINNER SIZE: 10" Nylon/Glass Reinforced Resin

AVAILABLE MOUNTS: 2" Light-Duty Hitch Mount (std)

#### **QUICK-CASTER 300W**

#### POLY TAILGATE SPREADER WITH WIRELESS CONTROL

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt
CAPACITY (VOLUME):	3.0 cu ft
SPREAD WIDTH:	Up to 25'
APPROXIMATE WEIGHT (EMPTY	'): 68 lb

OVERALL DIMENSIONS (LxWxH): 22" x 30" x 32"

MOTOR: Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 2.5" x 5.75" Vertical High-Flow Auger

SPINNER SIZE: 10" Nylon/Glass Reinforced Resin

AVAILABLE MOUNTS: 2" Receiver (std)

OPTIONAL MOUNTS: Drop Utility, Trailer Utility, 3-Point Mounts

#### LOW PROFILE 500 POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch
MATERIAL COMPATIBILITY:	Bagged Ice Melters,
Bagged Rock Salt, Calcium Flakes*	, & Calcium Chloride Pellets*
CAPACITY (VOLUME):	5.00 cu ft
SPREAD WIDTH:	Up to 30'

APPROXIMATE WEIGHT (EMPTY)	75 lb with mount
OVERALL DIMENSIONS (LxWxH):	21" x 39" x 34"
MOTOR:	Electric, 12V, 1/3 hp
AUGER (DIAMETER X LENGTH):	2.63" x 6"
SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

#### TAILGATE SPREADER TECHNICAL SPECS

#### LOW PROFILE 1000 POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY: Full Size Truck	s (Over 6,000 lb GVWR)
MATERIAL COMPATIBILITY:	Bagged Ice Melters,
Bagged Rock Salt, Calcium Flakes*, & Ca	alcium Chloride Pellets*
CAPACITY (VOLUME):	8.00 cu ft
SPREAD WIDTH:	Up to 30'

APPROXIMATE WEIGHT (EMPTY): 105 lb without mount
OVERALL DIMENSIONS (LxWxH): 19.5" x 50.5" x 35"

MOTOR: Electric, 12V, 1/3 hp
AUGER (DIAMETER X LENGTH): 2.63" x 6"

SPINNER SIZE: 10" Nylon/Glass Reinforced Resin
OPTIONAL MOUNTS: Fixed Mount, Class IV Hitch Mount, Dual-Swing

#### LOW PROFILE 2500 POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY: Full Size Tru	ucks (Over 6,000 lb GVWR)
MATERIAL COMPATIBILITY:	Bagged Ice Melters,
Bagged Rock Salt, Calcium Flakes*, 8	& Calcium Chloride Pellets*
CAPACITY (VOLUME):	8.50 cu ft
SPREAD WIDTH:	Un to 30'

APPROXIMATE WEIGHT (EMPTY): 131 lb without mount

OVERALL DIMENSIONS (LxWxH): 25" x 50" x 42"

MOTOR: Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 2.63" x 9"

SPINNER SIZE: 15" Nylon/Glass Reinforced Resin

OPTIONAL MOUNTS: Class IV Receiver Hitch Mount (std)

#### **SPEED-CASTER™ 525**

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt
CAPACITY (VOLUME):	5.25 cu ft
SPREAD WIDTH:	Up to 30'
APPROXIMATE WEIGHT (EMI	PTY): 160 lb

OVERALL DIMENSIONS (LxWxH):

MOTOR:
Dual Electric, 12V, 1/3 hp
AUGER (DIAMETER X LENGTH):
3" x 14" Heavy-Duty Solid Steel
SPINNER SIZE:
10" Nylon/Glass Reinforced Resin
AVAILABLE MOUNTS:
0PTIONAL MOUNTS:
Drop Utility, Trailer Utility, 3-Point Mounts

POLY TAILGATE

SPREADER

**POLY TAILGATE** 

SPREADER

#### **SPEED-CASTER 900**

HOPPER CONSTRUCTION: Polyethylene
VEHICLE COMPATIBILITY: 1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY: Bagged Rock Salt & Bulk Rock Salt
CAPACITY (VOLUME): 9.00 cu ft
SPREAD WIDTH: Up to 40'
APPROXIMATE WEIGHT (EMPTY): 180 lb

OVERALL DIMENSIONS (LxWxH): 24" x 52" x 36"

MOTOR: Dual Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 3" x 20" Heavy-Duty Solid Steel

SPINNER SIZE: 12" Nylon/Glass Reinforced Resin

OPTIONAL MOUNTS: Pivot Mount, 2" Receiver Hitch

(Requires Adapter Mount), 3-Point Hitch Mount

#### COMPREHENSIVE - METRIC SYSTEM

#### **QUICK-CASTER™ 300**

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt
CAPACITY (VOLUME):	0.09 cu m
SPREAD WIDTH:	7.6 m

APPROXIMATE WEIGHT (EMPTY): 30.8 kg OVERALL DIMENSIONS (LxWxH): 55.9 cm x 76.2 cm x 76.2 cm MOTOR: 12-volt DC motor mounted in weather-resistant enclosure AUGER (DIAMETER X LENGTH): 6.35 cm x 14.61 cm Vertical High-Flow Auger SPINNER SIZE: 25.4 cm Nylon/Glass Reinforced Resin **AVAILABLE MOUNTS:** 2.54 cm Light-Duty Hitch Mount (std)

#### **QUICK-CASTER 300G**

TAILGATE SPREADER ELECTRIC FEEDGATE

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY	): 34.0 kg
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH)	55.9 cm x 76.2 cm x 76.2 cm
MATERIAL COMPATIBILITY: Ba	gged Ice Melters, Clacium Flakes,	MOTOR: 12-volt DC motor mour	nted in weather-resistant enclosure
Calcium C	Chloride Pellets, Bagged Rock Salt	AUGER (DIAMETER X LENGTH):	-
CAPACITY (VOLUME):	0.09 cu m	SPINNER SIZE: 25.	4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	6.1 m	AVAILABLE MOUNTS: 2.5	54 cm Light-Duty Hitch Mount (std)

#### **QUICK-CASTER 300W**

TAILGATE SPREADER CONTROL

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (	LxWxH):	55.9 cm x 76.2 cm x 81.3 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:		Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt	AUGER (DIAMETER X LENG	TH): 6.35 cm	x 14.61 cm Vertical High-Flow Auger
CAPACITY (VOLUME):	0.09 cu m	SPINNER SIZE:	25.4 cm	Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 7.6 m	AVAILABLE MOUNTS:		2.54 cm Receiver (std)
APPROXIMATE WEIGHT (EMPT)	<b>()</b> : 30.8 kg	OPTIONAL MOUNTS:	Drop Utility	, Trailer Utility, 3-Point Mounts

#### **LOW PROFILE 500 POLY TAILGATE**

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPT	Y): 34.0 kg with mount
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch	OVERALL DIMENSIONS (LxWxF	H): 53.3 cm x 99.1 cm x 86.4 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters,	MOTOR:	Electric, 12V, 1/3 hp
Bagged Rock Salt, Calcium Flakes	*, & Calcium Chloride Pellets*	AUGER (DIAMETER X LENGTH)	: 6.68 cm x 15.24 cm
CAPACITY (VOLUME):	0.14 cu m	SPINNER SIZE: 25	5.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 9.14 m	AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

#### TAILGATE SPREADER TECHNICAL SPECS

#### LOW PROFILE 1000 POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY: Full Size Truck	s (Over 6,000 lb GVWR)
MATERIAL COMPATIBILITY:	Bagged Ice Melters,
Bagged Rock Salt, Calcium Flakes*, & C	Calcium Chloride Pellets*
CAPACITY (VOLUME):	0.23 cu m
SPREAD WIDTH:	Up to 9.14 m

APPROXIMATE WEIGHT (EMPTY): 47 kg without mount

OVERALL DIMENSIONS (LxWxH): 49.5 cm x 128.3 cm x 88.9 cm

MOTOR: Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 6.68 cm x 15.24 cm

SPINNER SIZE: 25.4 cm Nylon/Glass Reinforced Resin

OPTIONAL MOUNTS: Fixed Mount, Class IV Hitch Mount, Dual-Swing

#### LOW PROFILE 2500 POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY: Full Size Trucks	(Over 6,000 lb GVWR)
MATERIAL COMPATIBILITY:	Bagged Ice Melters,
Bagged Rock Salt, Calcium Flakes*, & Ca	lcium Chloride Pellets*
CAPACITY (VOLUME):	0.24 cu m
SPREAD WIDTH:	9.14 m

APPROXIMATE WEIGHT (EMPTY): 59.4 kg without mount

OVERALL DIMENSIONS (LxWxH): 63.5 cm x 127 cm x 106.7 cm

MOTOR: Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 6.68 cm x 22.86 cm

SPINNER SIZE: 38.1 cm Nylon/Glass Reinforced Resin

OPTIONAL MOUNTS: Class IV Receiver Hitch Mount (std)

#### **SPEED-CASTER™ 525**

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt
CAPACITY (VOLUME):	0.15 cu m
SPREAD WIDTH:	9.14 m
APPROXIMATE WEIGHT (EMI	<b>PTY):</b> 72.6 kg

OVERALL DIMENSIONS (LxWxH): 52.1 cm x 96.5 cm x 86.4 cm

MOTOR: Dual Electric, 12V, 1/3 hp

AUGER (DIAMETER X LENGTH): 7.62 cm x 35.56 cm Heavy-Duty Solid Steel

SPINNER SIZE: 25.4 cm Nylon/Glass Reinforced Resin

AVAILABLE MOUNTS: 2.54 cm Receiver (std)

OPTIONAL MOUNTS: Drop Utility, Trailer Utility, 3-Point Mounts

#### **SPEED-CASTER 900**

HOPPER CONSTRUCTION:	Polyethylene
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt
CAPACITY (VOLUME):	0.25 cu m
SPREAD WIDTH:	12.2 m
APPROXIMATE WEIGHT (EM	<b>PTY):</b> 81.7 kg

#### POLY TAILGATE SPREADER

**POLY TAILGATE** 

SPREADER

OVERALL DIMENSIONS (LxW	<b>VxH):</b> 61.0 cm x 132.1 cm x 91.4 cm
MOTOR:	Dual Electric, 12V, 1/3 hp
AUGER (DIAMETER X LENGTH	1): 7.62 cm x 50.8 cm Heavy-Duty Solid Steel
SPINNER SIZE:	30.5 cm Nylon/Glass Reinforced Resin
OPTIONAL MOUNTS:	Pivot Mount, 2.54 cm Receiver Hitch
(Require	es Adapter Mount), 3-Point Hitch Mount





## SIDEWALK + STORAGE PRODUCTS Fisher Engineering's sidewalk and storage products facilitate effective snow and ice

Fisher Engineering's sidewalk and storage products facilitate effective snow and ice management in urban settings. This collection includes drop and broadcast spreaders and a liquid sprayer for sidewalk treatment.



#### WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is built for treating wider pedestrian areas such as driveways, courtyards, and wide walkways.

CAPACITY: 0.5 cu ft (0.04 cu m) | 100 lb (45.36 kg)

SPREAD WIDTH: Up to 20' (6.0 m)

MATERIAL TYPES: Bagged Ice Melters, Bagged Rock Salt
Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



#### WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is made for treating walkways and keeping material out of adjoining landscape features.

CAPACITY: 1.5 cu ft (0.04 cu m) | 160 lb (75.57 kg)

SPREAD WIDTH: 36' (11.0 m)

MATERIAL TYPES: Bagged Ice Melters, Bagged Rock Salt
Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



#### SS-120 SIDEWALK SPRAYER

The SS-120 walk-behind sprayer gives you battery-powered convenience and a heavy-duty spray wand for stairs and other places where granular deicers are ineffective, such as curbs and steps. Pretreating with liquid brine allows you to use less salt, save time, and deliver exceptional results.

**CAPACITY:** 12 gallons (*45.4 L*)

**SPRAY WIDTH:** Up to 48" (*122 cm*)

MATERIAL TYPES: Brine, Calcium Chloride Solution,

Premium Solutions

#### **ALL-WEATHER STORAGE CONTAINERS**

Streamline your operations by storing salt, tools, PPE, and supplies where you need them with FISHER storage containers. These weatherproof polyethylene units are available in four sizes—3, 6, 12, and 18 cubic feet—to suit any storage requirement.






SNOW + ICE IN OUR DNA

In 1948, a man named Dean Fisher started a snowplow company. The name was simple: His. And the destination was busy: Boston. So after a trip to see the in-laws in Maine, the plan changed.

Fisher chose a small coastal town called Rockland. In his words: "What better place to build snowplows than in snow country?" He began in a small garage by the water, and designed over 50 snowplows that first winter. Parts were chained to the pier—testing corrosion in the cold, salty ocean. That set the relentless bar for every winter to come. Over 75 years later, snowplows from Fisher Engineering are

frozen into culture as the leader of snow and ice removal. Our success grew us out of the garage, but we've always kept that day-one spirit. Still building, testing, and proving right here in Rockland.



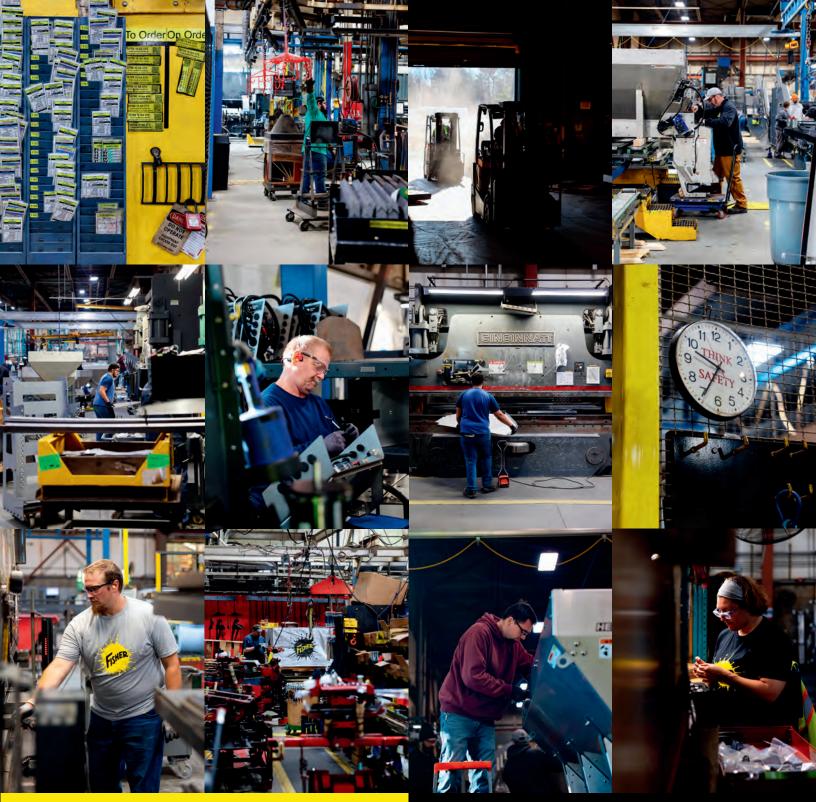





"THE BEST PRODUCT WE KNOW HOW TO MAKE.
THE BEST SERVICE WE KNOW HOW TO GIVE."

-Dean Fisher



# INSIDE THIS 7TH GENERATION MAINER'S LIFE, LOSS, & LEGACY.

Dave Wiley is the Technical Service Manager at Fisher Engineering and has been with the brand since 2009. But his roots in Maine go far deeper. He's the 7th generation to live on his family's property in Warren, and holds a special perspective on life, loss, and what it means to build a legacy. In this debut episode of FISHER Stories, we join Dave and his restored 1953 Jeep Willy to uncover the person behind the plow.

Scan to watch





