SNOW & ICE CONTROL




# DIRECT LIQUID APPLICATION

**You put in the hours to finish what you start—and then do it all over again—to earn your place. You've dedicated your career to snow and ice management and control, and you deserve the utmost respect.**

Founded on innovation in 1997, TrynEx International acknowledges those who put it all on the line by delivering the most dependable and low maintenance equipment available. Designed by people who understand your business from first hand experience, we support doers with durable, technologically advanced equipment, an industry-leading warranty, and unrivaled customer service.

For the diligent and determined, those with a dream and the grit to make it reality, it's time to make your mark.

SnowEx®







# Liqui Maxx™

HIGH VOLUME
LIQUID SPRAY
SYSTEMS

TSA-300, TSA-500, TSA-750, TSA-1250



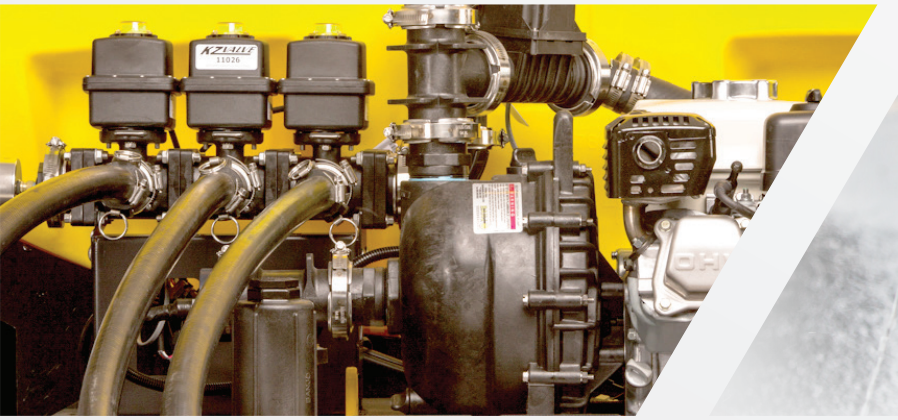

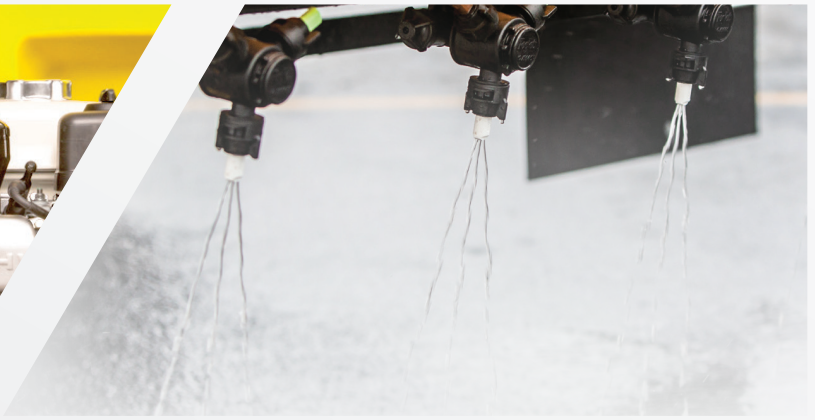FEATURES & SPECIFICATIONS

## MODULAR DESIGN

Interchangeable tank, pump, and boom assemblies allow for customizing equipment to your vehicle fleet and service demands. Choose between 4 tank sizes and 3 pump/control packages.

## ELLIPTICAL TANKS

Unique elliptical tank designs offer low centers of gravity and include sumps for complete draining.

## DRY-SEAL PUMP

Durable, dry-seal pumps have a low-water shutoff that prevents them from running dry, ensuring long-lasting seal performance.

## STANDARD CONTROL

**STANDARD: HFS-100-2**

Standard control and pump system includes toggle switches that turn the 3 spray zones off and on for simple, no-hassle operation.

## DELUXE CONTROL

**STANDARD (HFD-200EX / HFD-200HYD)**

Works with optional GPS speed sensor to calculate ideal application rate per vehicle speed and automatically adjust flow as needed. Features 3-zone spray capability.

## ADJUSTABLE BOOM NOZZLES

The boom includes 3 nozzle sizes on a rotating assembly to adjust spray volume to accommodate speed ranges. Wing nozzles can be manually adjusted for direction and flow control.

## ADDITIONAL FEATURES

The Liqui Maxx™ spray system features a filtered Bottom-Fill Port, Electric Gas Pump Platform (HFD-200EX) and Hydraulic Pump Platform (HFD-200HYD).



| MODEL: | TSA-300 | TSA-500 | TSA-750 | TSA-1250 |
|---|---|---|---|---|
| **Capacity** | 300 gal | 500 gal | 750 gal | 1,250 gal |
| **Empty Weight** | 320 lb | 475 lb | 740 lb | 860 lb |
| **Overall Length** w/ pump | 101" | 112" | 118" | 119" |

ACCESSORIES

### BOOM NOZZLE KITS



### BLAST/RUN/HOLD REMOTE SWITCH BOX



### HOSE REEL KIT



### WORK LIGHT KIT



### STROBE LIGHT KIT



### GPS SPEED SENSOR





### STRAINER BASKET

Provides filtration for top filling (8" or 16" available).

OPTIONAL



### UNIVERSAL MOUNT KIT

Ratchet straps, brackets & hardware for truck bed mounting included.



### BOOM MOUNT KIT

An adjustable 2" drop receiver that mounts to the pump platform. Ideal for larger or taller vehicles.

For accessory compatibility and availability, consult your local SnowEx® dealer or visit **snowexproducts.com**

SnowEx®

# AccuSpray™

VSS-1000-1
VSS-2000/VSS-3000

ELECTRIC-PLATFORM
LIQUID SPRAY
SYSTEMS









FEATURES & SPECIFICATIONS

## BAFFLED TANK DESIGN

Reduces the impact of liquid surges when stopping or turning, which minimizes wear and tear on the vehicle and improves safety.

## CURB SPRAY NOZZLES

**VSS-2000/VSS-3000**

The left and right ends of the spray boom include specialized nozzles to more accurately and effectively apply brine to curb areas.

## 3-POSITION NOZZLES

Center boom nozzles are adjustable for 3 spray settings: triple stream, single stream, or wide. These settings make the sprayers highly adaptable to a wide variety of applications.

## MULTI-ZONE CONTROL

**STANDARD: VSS-2000/VSS-3000**

Allows for independent management of the center boom nozzles, curb spraying nozzles, and spot spraying wand.

## ON/OFF SWITCH

**STANDARD: VSS-1000-1**

A simple control with a traditional "on/off" button to start and stop the sprayer.

| MODEL: | VSS-1000-1 | VSS-2000 | VSS-3000 |
|---|---|---|---|
| **Capacity** | 100 gal | 200 gal | 300 gal |
| **Empty Weight** | 172 lb | 450 lb | 520 lb |
| **Overall Length** | 60" | 88" | 94" |
| **Vehicle Compatibility** | UTVs & Trucks | 3/4 or 1-Ton Pickup Truck | 3/4 or 1-Ton Pickup Truck |

## STANDARD HOSE REEL/SPRAY WAND

**VSS-1000-1**

Allows for spot spraying of brine—excellent for stairs and curbs. Comes standard with 50 feet of hose.

## WORK LIGHT

**VSS-2000/VSS-3000**

Provides maximum visibility of the application helping the operator achieve the best results.

## UTV COMPATIBLE

The VSS-1000-1 features a compact design to fit most UTV beds, making it perfect for maintaining sidewalks and pedestrian walkways.







ACCESSORIES



**HOSE REEL KIT**
**VSS-2000/VSS-3000**

Adds spot spraying capabilities to the unit. Bolts directly to the sprayer frame and includes spray wand with 100-foot hose.



**SPRAY WAND**

**STANDARD: VSS-1000-1**
**OPTIONAL: VSS-2000/VSS-3000**

Allows spot spraying applications in areas that are difficult for the vehicle to reach. This wand comes with 50 feet of hose.

For accessory compatibility and availability, consult your local SnowEx® dealer or visit **snowexproducts.com**

SnowEx®



SnowEx
LiquiMAXX
LiquiMAXX
SnowEx

# Walk-Behind Sprayer

SL-80 / SL-80SS





RECHARGEABLE BATTERY



BOOMLESS NOZZLE



SPRAY WAND

FEATURES & SPECIFICATIONS

## BATTERY-POWERED ELECTRIC PUMP

Powered by a 12-volt electric pump that sprays up to one gallon per minute at 60 psi. Battery powers up to ten full tanks (120 gal) with a single charge and recharges in 12–16 hours.

## ADJUSTABLE-HEIGHT BOOMLESS NOZZLE

Sprays up to 48 inches wide and can be height adjusted.

## SPRAY WAND

Allows for spot spraying of brine—excellent for stairs and curbs.

## STAINLESS STEEL FRAME*

Durable stainless steel frame enhances corrosion resistance.

## LARGE FILL CAP

Extra wide opening is easy to fill and accessible.

## OVERSIZE TIRES

Large, pneumatic tires enhance maneuverability over ice and snow.

*Only available on the SL-80SS model.

| MODEL: | SL-80 | SL-80SS |
|---|---|---|
| Capacity | 12 gal | 12 gal |
| Empty Weight | 60 lb | 60 lb |

For accessory compatibility and availability, consult your local SnowEx® dealer or visit **snowexproducts.com**

SnowEx®



## Liqui Maxx™

| | | TSA-300 | TSA-500 | TSA-750 | TSA-1250 |
|---|---|---|---|---|---|
| TANK PLATFORM | Empty Weight | 320 lb (145.2 kg) | 475 lb (215.5 kg) | 740 lb (335.7 kg) | 860 lb (390.1 kg) |
| | Overall Length (w/Pump) | 101" (256.5 cm) | 112" (284.5 cm) | 118" (299.7 cm) | 119" (302.3 cm) |
| | Overall Height | 42" (106.7 cm) | 54" (137.2 cm) | 55" (139.7 cm) | 73" (185.4 cm) |
| | Overall Width | 54" (137.2 cm) | 59" (149.9 cm) | 75" (190.5 cm) | 85" (215.9 cm) |
| | Capacity | 300 gal (1,135.6 L) | 500 gal (1,892.7 L) | 750 gal (2,839.1 L) | 1,250 gal (4,731.8 L) |
| | Suggested Gross Vehicle Weight Rating (GVWR)* | 8,500-10,000 lb (3,855.5-4,535.9 kg) | 14,000-16,000 lb (6,350.3-7,257.5 kg) | 16,000-19,500 lb (7,257.5-8,845.1 kg) | 19,500-26,000 lb (8,845.1-11,793.4 kg) |
| | Vehicle Class | Class 2B | Class 4 | Class 5 | Class 6 |
| PUMP PLATFORM | Pump Part Number | HFS-100-2, HFD-200EX, or HFD-200HYD | | | |
| | Gas Motor/ Standard Control (HFS-100) | Manual Start 5.5 hp HONDA®/On-off 3-zone control | | | |
| | Gas Motor/ Deluxe Control (HFD-200EX) | Electric Start 5.5 hp HONDA®/Automatic, 3-zone controlled flow (GPS optional) | | | |
| | Hydraulic Motor/ Deluxe Control (HFD-200HYD) | Hydraulic with spool valve | | | |
| | Pump Frame | Powder coated steel with two-way fork pockets | | | |
| | Pump | 210 gal/min Dry-Seal centrifugal circulation pump | | | |
| | Primary Valves | Electric ball valves | | | |
| BOOM PLATFORM | Overall Width | 8' 2" (2.49 m) | | | |
| | Spray Width (Boom only) | 8' (2.44 m) | | | |
| | Spray Width (w/Wing sprayer) | 24' (7.32 m) | | | |
| | Mounting | Standard receiver hitch mount | | | |
| | Spraying Capacity | 10 to 60 gal/acre depending on vehicle speed | | | |

*Verify your vehicle meets the size and weight requirements.
All SnowEx® equipment is covered by a 2-year warranty. Specifications subject to change without prior notice.

**Please visit snowexproducts.com for the most current specifications.**



## AccuSpray™

| | VSS-1000-1 | VSS-2000 | VSS-3000 |
|---|---|---|---|
| **Empty Weight** | 172 lb (78.0 kg) | 450 lb (204.1 kg) | 520 lb (235.9 kg) |
| **Overall Length** | 60" (154.4 cm) | 88" (223.5 cm) | 94" (238.8 cm) |
| **Overall Height** | 50" (127.0 cm) | 64" (162.6 cm) | 68" (172.7 cm) |
| **Overall Width** | 48" boom (121.9 cm) | 82" boom (208.3 cm) | |
| **Floor Length** | 45" (114.3 cm) | 74" (188.0 cm) | 80" (203.2 cm) |
| **Floor Width** | 32" (81.3 cm) | 36" (91.4 cm) | 39" (99.1 cm) |
| **Tank Length** | 37" (94.0 cm) | 47" (119.4 cm) | 60" (152.4 cm) |
| **Tank Width** | 30" (76.2 cm) | 37" (94.0 cm) | 42" (106.7 cm) |
| **Capacity** | 100 gal (378.5 L) | 200 gal (757.1 L) | 300 gal (1,135.6 L) |
| **Spraying Width** | Up to 6' (1.8 m) | Up to 25' (7.6 m) | |
| **Spraying Volume** | 48" boom (121.9 cm) | 82" boom (208.3 cm) | |
| | 20 gal per lane mile/acre at 10 mph | | |



## Walk-Behind Sprayer

| SL-80 | SL-80SS |
|---|---|
| 60 lb (27.2 kg) | 60 lb (27.2 kg) |
| 48" (121.9 cm) | 48" (121.9 cm |
| 33" (83.8 cm) | 33" (83.8 cm) |
| 28" (71.1 cm) | 28" (71.1 cm) |
| N/A | N/A |
| N/A | N/A |
| N/A | N/A |
| N/A | N/A |
| 12 gal (45.4 L) | 12 gal (45.4 L) |
| Up to 48" (121.9 cm) | Up to 48" (121.9 cm) |
| 1 gal/min (3.8 L/min) | 1 gal/min (3.8 L/min) |

## VEHICLE COMPATIBILITY



### AccuSpray™

| | VSS-1000-1 | VSS-2000 | VSS-3000 |
|---|---|---|---|
| **UTV** | X | | |
| **1/2-Ton Pickup Truck** | | | |
| **3/4- & 1-Ton Pickup Truck** | | X | X |
| **Flat Bed** | | | X |
| **Dump Bed** | | | X |



### Liqui Maxx™

| 300 gal | 500 gal | 750 gal | 1,250 gal |
|---|---|---|---|
| | | | |
| | | | |
| X | | | |
| | X | X | X |
| | X | X | X |

For accessory compatibility and availability, consult your local SnowEx® dealer or visit **snowexproducts.com**

SnowEx®

SNOWEX®

MAKE YOUR MARK

**SPREADERS / PLOWS / LIQUIDS / SIDEWALKS**

Sourcewell
Awarded Contract
Contract # 033126-DDY

TrynEx International holds a national cooperative contract through Sourcewell, formerly NJPA, a government agency that offers cooperative purchasing and other services to more than 50,000 government entities and nonprofit organizations such as municipalities, counties, DOT and educational institutions. Sourcewell Members can save both time and money purchasing from competitively solicited contracts. The awarded contract for TrynEx International includes pricing for its snow and ice handling equipment, supplies and accessories.

Specifications subject to change without notice. Images may not reflect dealer inventory and/or unit specifications.

TrynEx International, LLC, reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. TrynEx International, LLC, or the vehicle manufacturer may require or recommend optional equipment for sprayers. Do not exceed vehicle ratings with a sprayer. This product is manufactured under the following US patents: 9,890,310; 10,858,559; and other patents pending. TrynEx International, LLC, offers a limited warranty for all sprayers and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: AccuSpray™, Brine Pro™, Liqui Maxx™, HELIXX™, HDV™, Salt Traxx®, SnowEx®.

A DIVISION OF DOUGLAS DYNAMICS, LLC

© 2026 Douglas Dynamics, LLC. All rights reserved.

531 Ajax Drive | Madison Heights, MI 48071
**www.snowexproducts.com** | info@trynexfactory.com

Form No. 72847 - 7/26